# PROJECT OAK LEAF

EASTERN GAS TRANSMISSION AND STORAGE
A BHE PIPELINE GROUP COMPANY

## ABOUT EGTS

Eastern Gas Transmission and Storage, Inc. (EGTS), a BHE GT&S company, provides safe, reliable and affordable natural gas transportation and storage services to markets in Maryland, New York, Ohio, Pennsylvania, Virginia and West Virginia. EGTS safely operates nearly 4,000 miles of pipeline and more than 985,000 horsepower of compression, offering one of the largest underground natural gas storage systems in the United States. It links to other major pipeline markets in the Midwest, Mid-Atlantic and Northeast regions, and provides reliable energy for a number of large customers, including utilities and power plants, as well as local distribution companies to heat homes and run small businesses.

## PROJECT OVERVIEW

EGTS proposes Project Oak Leaf to increase the capacity of its PL-1 pipeline system to deliver incremental volume to serve end-use customers in Maryland and Virginia. Project Oak Leaf will leverage existing EGTS infrastructure while increasing the capacity on its system through pipeline and compressor station additions creating 250,000 dekatherms per day of additional natural gas capacity. Project Oak Leaf will establish primary receipt points at the Leidy Interconnection with Transcontinental Gas Pipeline in Clinton County, PA. Deliveries will be directed to one new interconnect in Frederick County, MD, as well as three existing interconnects in Frederick County, MD, and Loudoun County, VA.

Regulatory approval for the project will be obtained via application to the Federal Energy Regulatory Commission (FERC) pursuant to Section 7(c) of the Natural Gas Act.

EGTS is committed to safety and environmental respect for the benefit of communities and its employees. EGTS maintains operating policies and procedures that adhere to United States Department of Transportation (USDOT) safety requirements for inspections, testing, operations, preventive maintenance, repairs, vigilant patrols of facilities and more.

**Visit www.AboutOakLeaf.com for details.**

## PROJECT DETAILS

**Compressor Station Upgrades**

- ✓ Install new compression at three (3) existing compressor stations
- ✓ Modify/upgrade existing facilities at two (2) stations for improved efficiency

**Measurement & Regulation Stations**

- ✓ Construct one (1) new M&R station
- ✓ Modify/upgrade three (3) existing M&Rs

**Finnefrock South**
*Clinton County, PA*

- ✓ Install approx. 10.5 miles of 36" pipeline

**Centre South**
*Centre County, PA*

- ✓ Install approx. 15.5 miles of 36" pipeline

**Chambersburg South**
*Franklin County, PA*


- ✓ Install approx. 13.5 miles of 36" pipeline


**Myersville South**
*Frederick County, MD*

- ✓ Install approx. 13 miles of 36" pipeline

## PROPOSED SCHEDULE

| Milestone | Target |
|---|---|
| File FERC 7(c) Application | Q4 2026 |
| Receive FERC Certificate | Q1 2028 |
| Begin Construction | Q1 2028 |
| In-Service | Q4 2029 |

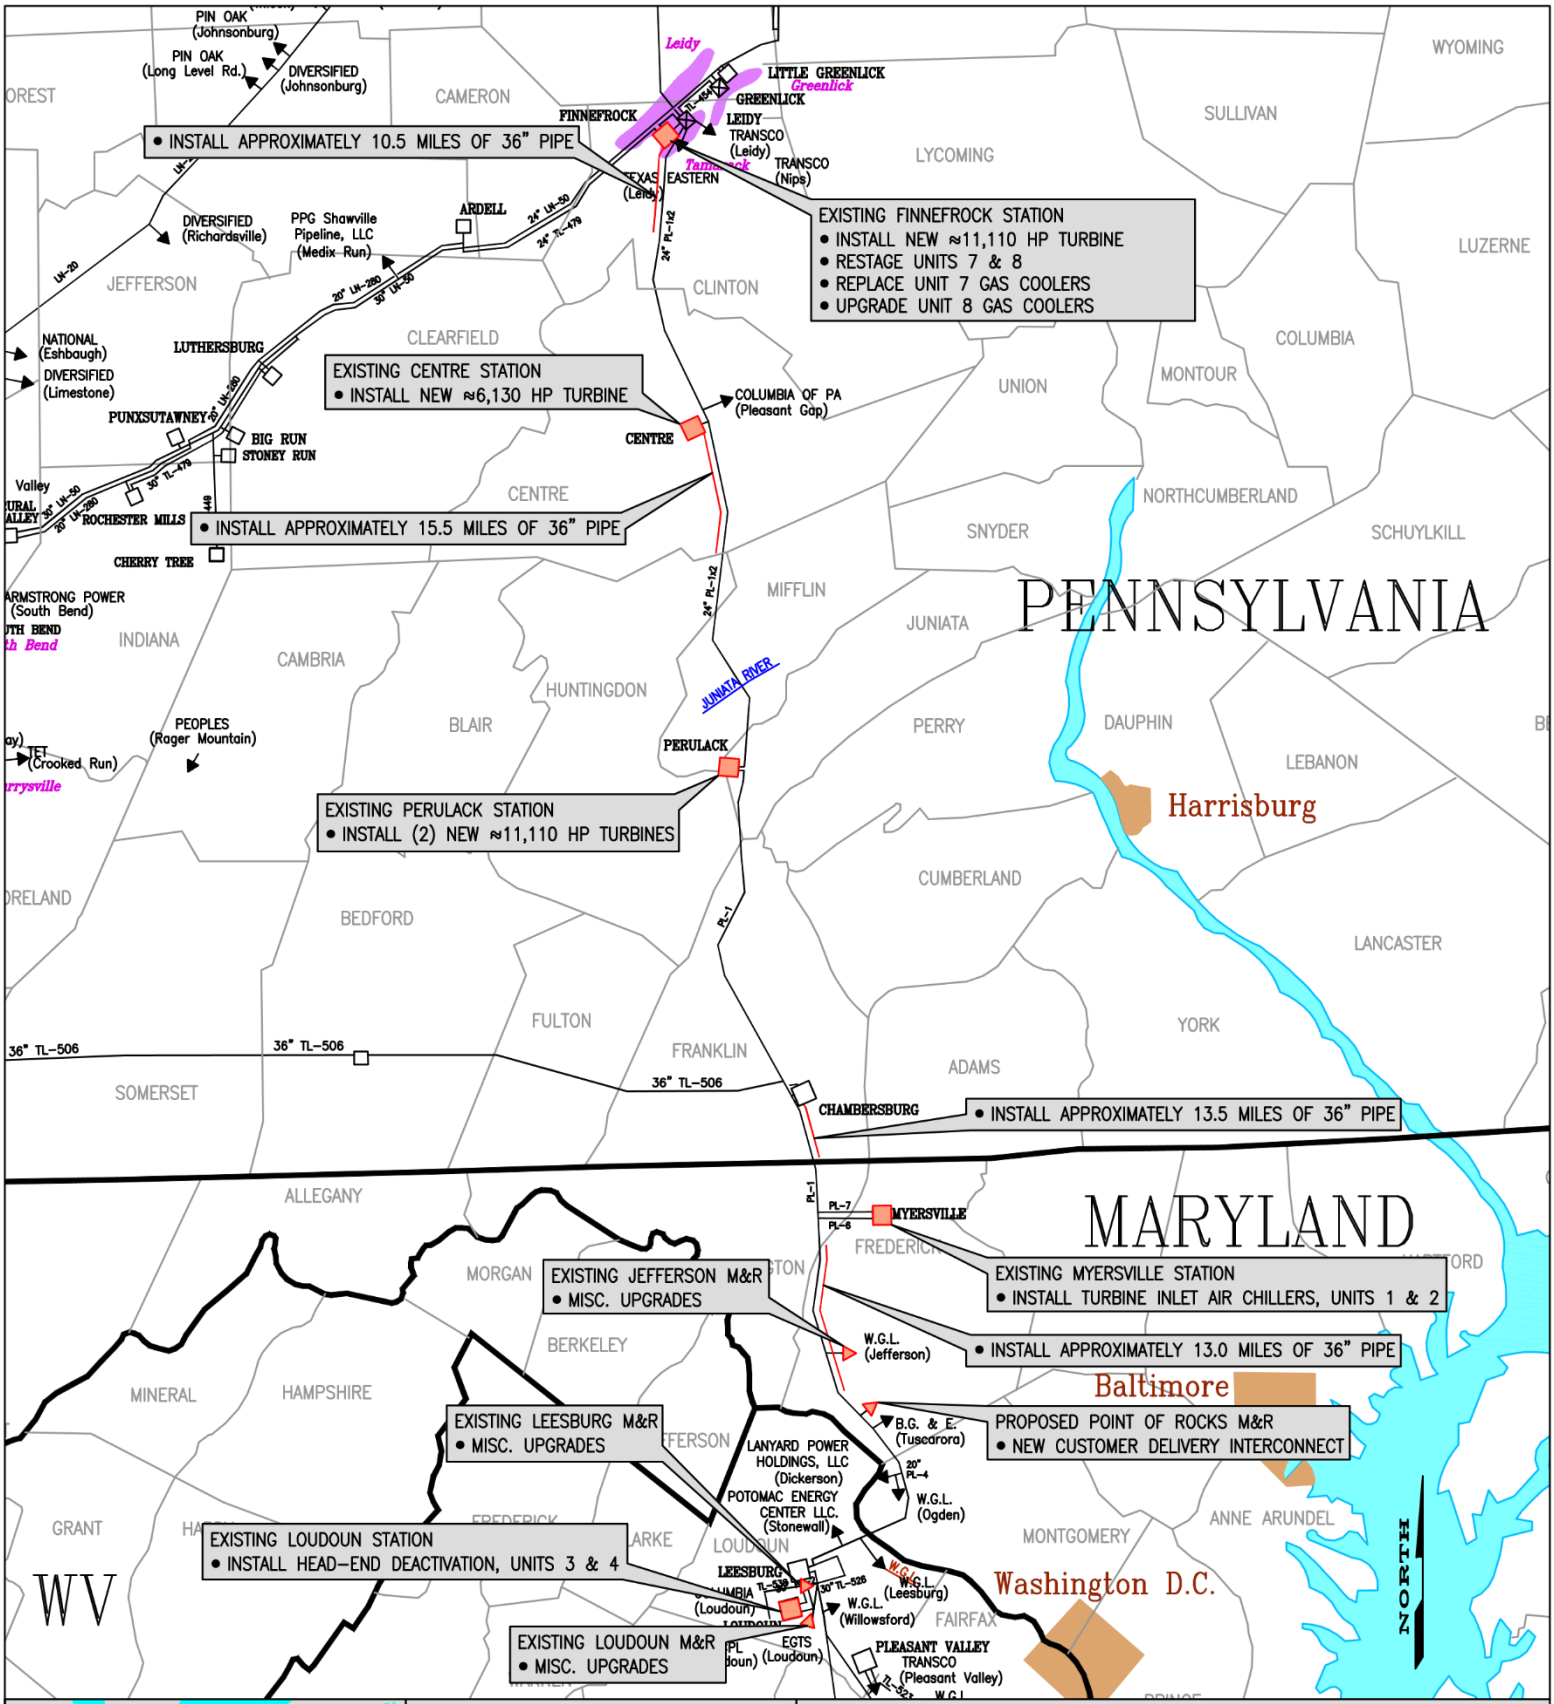

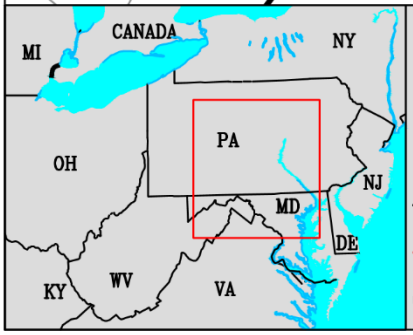
## Legend:

- = EGTS COMPRESSOR STATION
- = EGTS M&R
- = EXISTING EGTS PIPELINE
- = PROPOSED EGTS PIPELINE
- = STATE BOUNDARY


Eastern Gas Transmission and Storage, Inc.

925 White Oaks Blvd., Bridgeport, WV 26330

(681) 842-3000


# PROJECT OAK LEAF

DATE: 6-2-2026